



ADD: Huayi Industrial Park, Tongyi Industrial Zone, Guzhen, Zhongshan, Guangdong, China  
TEL: +86-760-2234 3677 FAX: +86-760-2235 9828  
E-mail: sales@okeslighting.com  
WEB: www.okeslighting.com www.okesled.com



The Combination Of Fashion And Art



## BRIEF INTRODUCTION OF CORPERATION



ZhongShan OKES Lighting Appliance Co., Ltd located in the lighting capital of China-Guzhen town. Established in 1993, after sixteen years development, the company has grown into an extremely professional manufacturer of lighting fixtures. Owing 2000 employees and occupying 20000 square meters, the company's annual output capacity has reached at 32 million pieces. Main products cover LED commercial light, energy saving lamp, fluorescent lighting fixture, switch & socket, ceiling lamp, and so on.

ZhongShan OKES Lighting Appliance Co., Ltd strictly carries out international quality control standard in order to ensure high quality products, which successively passed ISO9002, CE, UL, etc. In 1999, our ceiling lamp was entitled "High Quality Products" in Guangdong Province. Series of measures for quality improvement has made the products fully guaranteed. Moreover, ZhongShan OKES Lighting Appliance Co., Ltd cooperates closely to the domestic university, absorbing talent person, purchasing the first-class testing equipment and advocating the concept of "humanism", which enable our products to be more professional in the market.

On the sales, ZhongShan OKES Lighting Appliance Co., Ltd insist on market-oriented, production revolved around sales, and take our customer and the sales as the same important position in order to show our best service and excellent quality to the customer. The company takes the lead in selling lighting fixture by stores network in domestic market. Until now, there are 2000 brand stores in our domestic market. In term of overseas market, the turnover has been increasing year after year. Our products mainly export to Hongkong, Africa, Taiwan, South-east Asia, Middle Eastern and European countries.

Since ZhongShan OKES Lighting Appliance Co., Ltd was established, with its excellent quality, reasonable price, sound marketing network as well as good after-sales service, it has successfully earned the customer's trust and respect. In 2005, OKES Lighting Electrical CO.,LTD.



## LED DOWNLIGHT SERIES




### Key Features:

- Thicker aluminum, good heat-dissipation.
- High-brightness chip with good CRI and high lumen and reduce light decay.
- PC diffuser to have soft light without dazzling.
- IC constant current driver, no flicking and eye protection.
- Long-lifetime and energy-saving.
- OEM/ODM services are available


**Application :** hotel, home, conference room, restaurant




- **Material** Aluminum+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	Lumen	Beam angle
<b>OS05-010R</b>	8W	D95xH65mm	Ø85mm	720lm	120°
	12W	D115xH69mm	Ø100mm	1080lm	120°
	15W	D140x75mm	Ø130mm	1350lm	120°

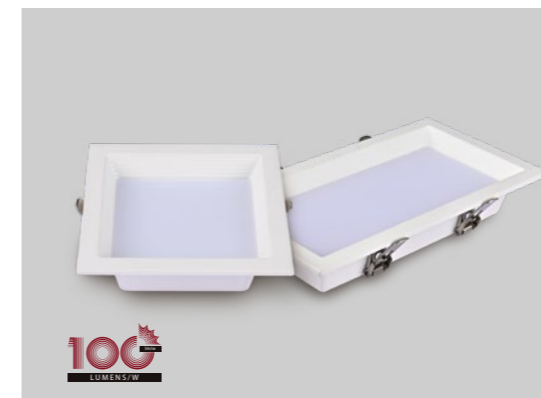

- **Material** Aluminum+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C




Model	Watts	Dimension	Cut out	Lumen	Beam angle
<b>OS05-009S</b>	9W	L125xW125mm	110x110mm	900lm	120°
	12W	L170xW170mm	155x155mm	1200lm	120°
	2x9W	L225xW120mm	200x100mm	2x900lm	120°







- **Material** LGP+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C




Model	Watts	Dimension	Cut out	Lumen	Beam angle
OS01-004RM-S	6W	Ø112xH28mm	Ø112xH28mm	250-350lm	120°
	12W	Ø162xH28mm	Ø162xH28mm	600-750lm	120°
	18W	Ø209xH28mm	Ø209xH28mm	1100-1300lm	120°
	24W	Ø285xH28mm	Ø285xH28mm	1500-1700lm	120°

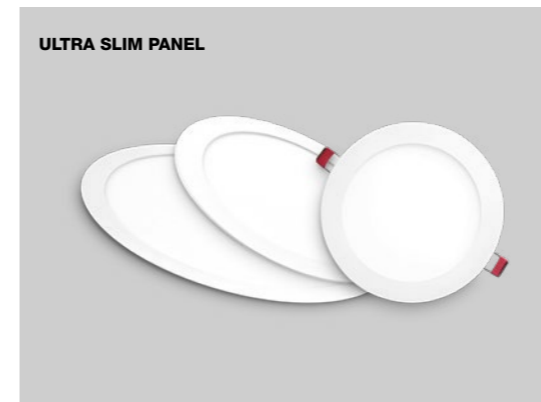


- **Material** Aluminum+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	Lumen	Beam angle
OS01-005RE	3W	Ø83mm	Ø70mm	180lm	120°
	6W	Ø118mm	Ø105mm	360lm	120°
	9W	Ø146mm	Ø130mm	540lm	120°
	12W	Ø168mm	Ø155mm	720lm	120°
	15W	Ø189mm	Ø175mm	900lm	120°
	18W	Ø222mm	Ø205mm	1080lm	120°
	24W	Ø294mm	Ø280mm	1440lm	120°

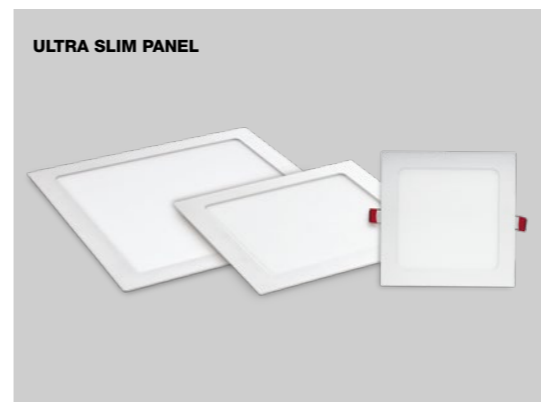

- **Material** Aluminum+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	Lumen	Beam angle
OS01-005SE	3W	□ 83x83	□ 70x70	180lm	120°
	6W	□ 117x117	□ 102x102	360lm	120°
	9W	□ 145x145	□ 132x132	540lm	120°
	12W	□ 167x167	□ 152x152	720lm	120°
	15W	□ 189x189	□ 175x175	900lm	120°
	18W	□ 218x218	□ 202x202	1080lm	120°
	24W	□ 292x292	□ 275x275	1440lm	120°



## LED DOWNLIGHT SERIES




### Key Features:

- Good-quality Iron material, good at heat dissipation and safer to protect led chips.
- High Brightness & Good Lighting Effect.
- Easy installation for residential.
- Good-brand LED driver, no flicking and eye protection.
- Supported design housing color.
- OEM/ODM services are availabl.

**Application :** hotel, home, conference room, restaurant






- **Material** Iron+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C




Model	Watts	Dimension	Cut out	Lumen	Beam angle
<b>OS05-019R</b>	5W	D100xH33mm	Ø70-90mm	400lm	120°
	7W	D116xH37mm	Ø75-95mm	560lm	120°
	12W	D148xH38mm	Ø110-125mm	960lm	120°
	18W	D180xH50mm	Ø130-150mm	1440lm	120°
	24W	D230xH70mm	Ø185-200mm	1920lm	120°



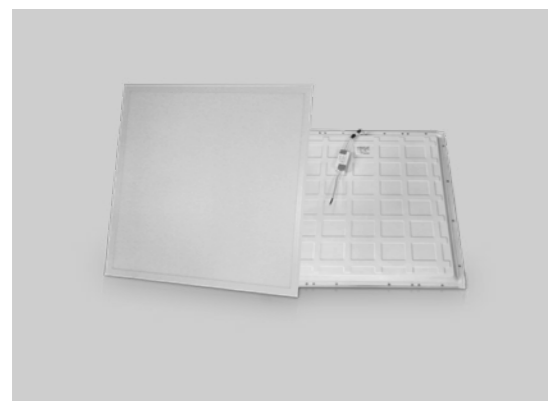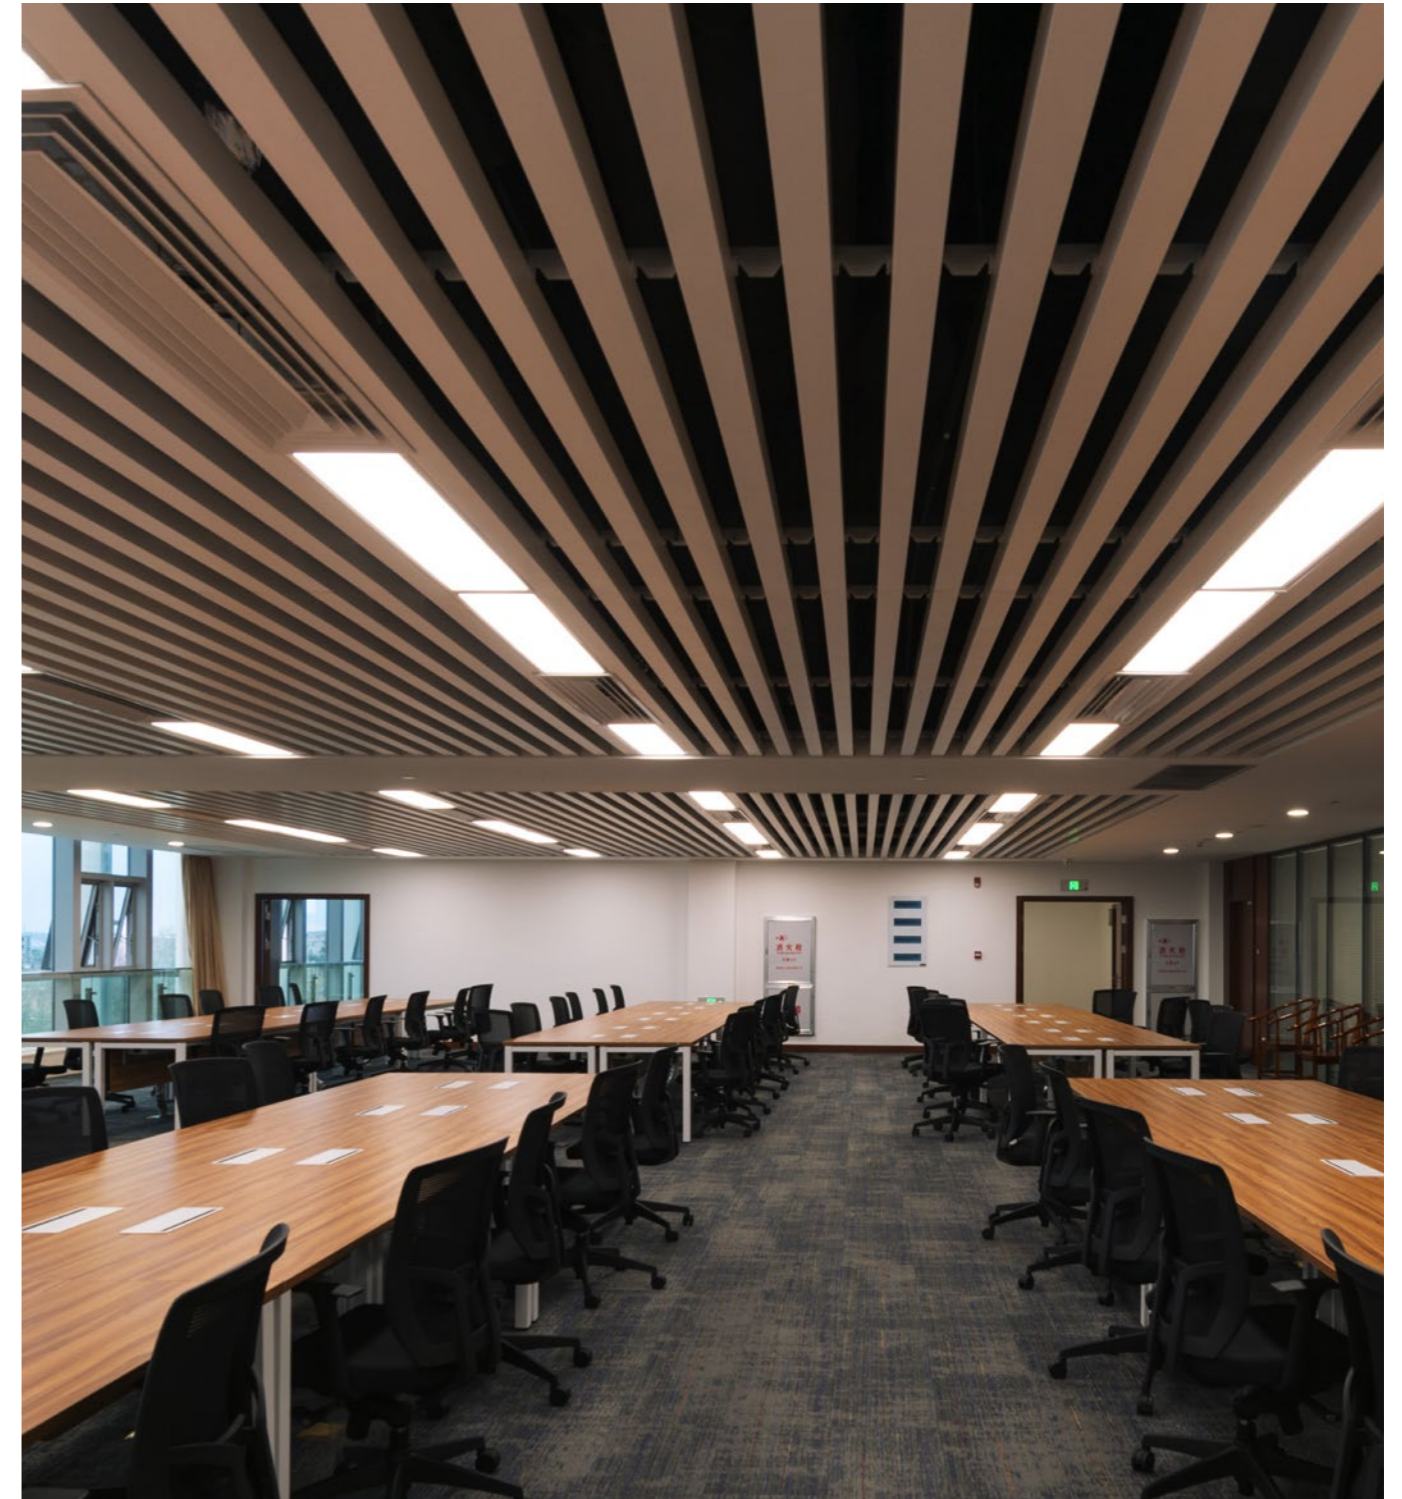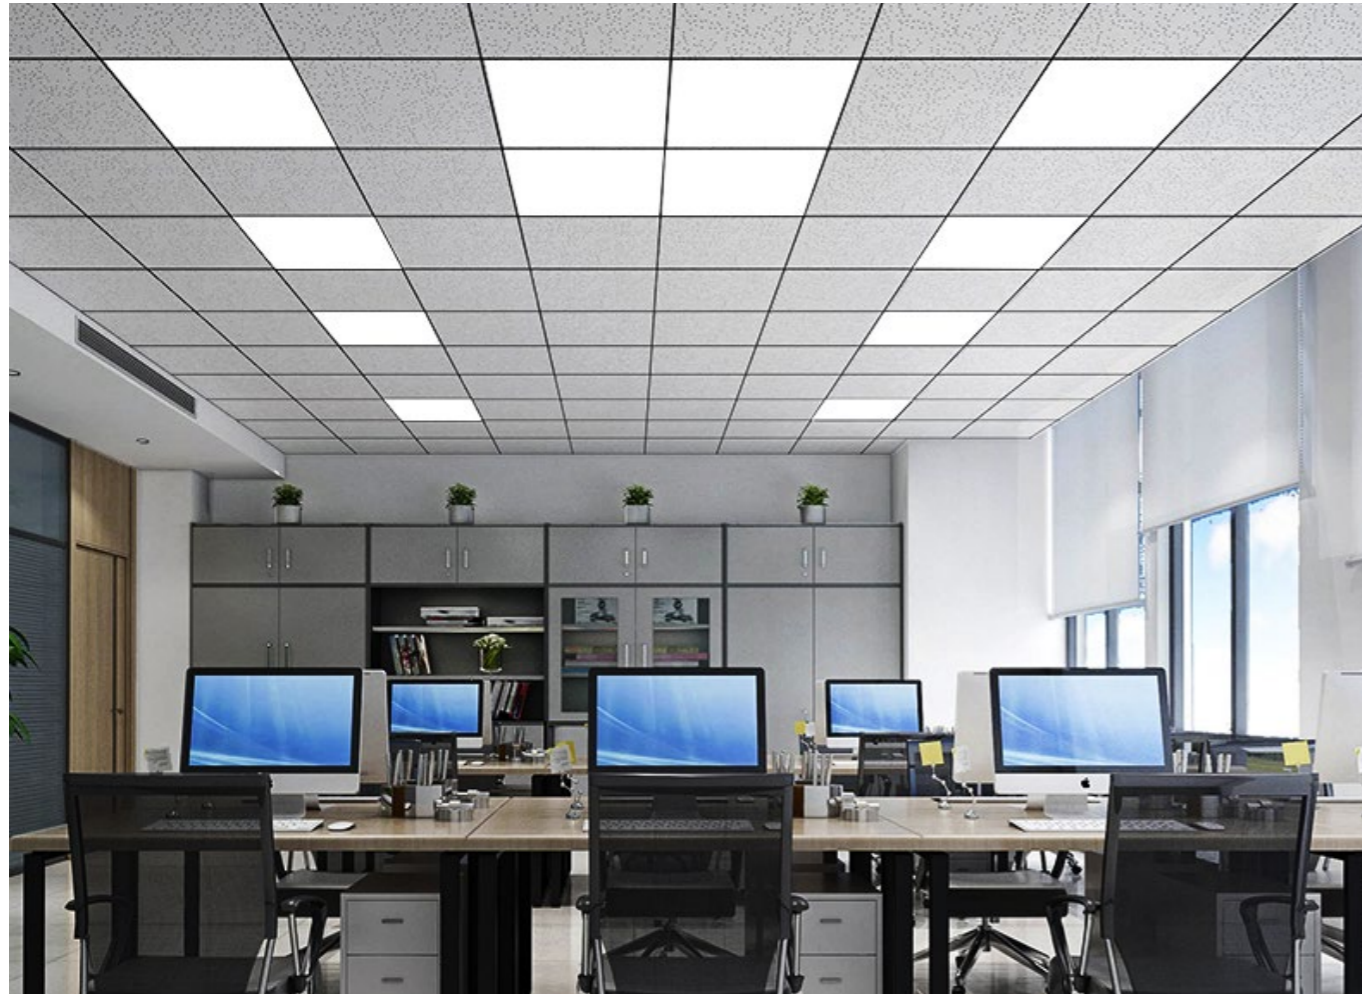

- **Material** Aluminum+Iron+PS
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	Lumen	Beam angle
<b>OS02-006</b>	20W	300x300x20mm	280x280mm	1600lm	120°
	36W	300x300x20mm	280x580mm	3200lm	120°
	48W	600x600x30mm	580x580mm	3840lm	120°
	60W	300x1200x30mm	280x1180mm	4800lm	120°
	100W	600x1200x30mm	580x1180mm	8000lm	120°



RAIL ACCESSORIES SERIES



**Key Features:**

- Strict selection of materials good copper core.
- Precision aluminum technology.
- Rail bar connection accessories.

**Application :** hotel, home, conference room, restaurant



Model	Dimension	Material
<b>OS03-070A</b>	1m/1.5m/2m	2 wire copper



Model	Dimension	Material
<b>OS03-081A</b>	215x40mm	ABS+copper



Model	Dimension	Material
<b>OS03-082A</b>	95x35mm	ABS+copper



Model	Dimension	Material
<b>OS03-083A</b>	65x65mm	ABS+copper



Model	Dimension	Material
<b>OS03-084A</b>	95x65mm	ABS+copper

## LED CEILING LAMP SERIES




### Key Features:

- A variety of styles & color choices, to meet different home decoration requirements.
- Good quality PMMA lampshade with good transmittance, reduces glare and brings comfortable lighting.
- Multi-angle free rotation.
- Three lighting experience modes, reading, entertainment, relaxation, lighting alternation freely by heart.
- Long Lifetime Durable In Use.

**Application :** hotel, bedroom, meeting room, office




- **Material** PVC cover + IRON Base+wood
- **Color rendering index** Ra>80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	lumen	Beam angle
<b>OS04-047</b>	12W	Ø300x50mm	/	1080lm	120°
	18W	Ø400x50mm	/	1620lm	120°
	24W	Ø500x50mm	/	2160lm	120°
	36W	Ø600x50mm	/	3240lm	120°



- **Material** Iron+PC
- **Color rendering index** Ra>80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Cut out	Lumen	Beam angle
<b>OS04-069</b>	24Wx2	Ø460x70mm	/	2040lmx2	120°
	36Wx2	Ø560x70mm	/	3060lmx2	120°



LED LIGHT SOURCE SERIES




**Key Features:**

- Classic vintage design
- No delay and flickers
- Low power consumption
- High luminous flux 110lm/W
- High transparent lampshade
- Constant current driving power supply

**Application :** hotel, home, conference room, restaurant




- **Material** Glass+aluminium
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Holder	Lumen	Beam angle
OS20-023FB	7W	Ø64x142H±2mm	E27	806lm	120°
	8W	Ø64x142H±2mm	E27	1055lm	120°



- **Material** Glass+aluminium
- **Color rendering index** Ra≥80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C



Model	Watts	Dimension	Holder	Lumen	Beam angle
OS20-015FB	4W	Ø35x100H±2mm	E14/E27	470lm	120°
	5W	Ø35x100H±2mm	E14/E27	600lm	120°
	6W	Ø35x100H±2mm	E14/E27	800lm	120°





**Key Features:**

- 2835 series high light efficiency.
- Shooting without flash screen.
- Create romance ambience with static and dynamic color modes.
- High Brightness & Good Lighting Effect.

**Application :** hotel, home, conference room, restaurant



- **Material** Silicon
- **Color rendering index** Ra>80
- **Ingress Protection** IP20
- **Operating temperature** -20°C~50°C

Model	Watts/M	PCB	Colour	Lumen	Beam angle
OS-08-220V-5050-026	5W	6x12mm	RGB	100LM/W	120°





## SPIKE LIGHT SERIES




### Key Features:

- Thicker aluminum material, good at heat dissipation and safer to protect led chips.
- High-brightness LED chip with good CRI and high lumen and reduce light decay.
- Two way installation, base or spike.
- IP65 waterproof and dust-proof and rustproof design.
- Long-lifetime and energy-saving.

**Application :** home, park, courtyard, garden, garage




- **Material** Aluminum+PMMA
- **Color rendering index** Ra≥80
- **Ingress Protection** IP65
- **Operating temperature** -20°C~50°C



Model	Voltage	Watts	Lumen	Beam angle	Chip	Dimension
<b>OS14-012SL</b>	AC175V-260V 50/60Hz	3W	210lm	30°	SMD	L145xW75xH260mm



- **Material** Aluminum+PMMA
- **Color rendering index** Ra≥80
- **Ingress Protection** IP65
- **Operating temperature** -20°C~50°C



Model	Voltage	Watts	Lumen	Beam angle	Chip	Dimension
<b>OS14-014SL</b>	AC100-240V 50/60Hz	7W	490lm	30°	COB	D70xH330mm
	AC100-240V 50/60Hz	15W	1050lm	30°	COB	D85xH330mm
	AC100-240V 50/60Hz	25W	1750lm	30°	COB	D105xH330mm



## SOLAR LAMP




### Key Features:

- Big high-brightness LED chip with clear lens
- Super-fast charging big solar panel
- IP67 be fearless of thunderstorm
- Long Lifetime Durable In Use

**Application :** hotel, home, yard, school ,playground,building




- **Material** Dia-casting Aluminium+ T2S Lens
- **Color rendering index** Ra≥80
- **Ingress Protection** IP66
- **Operating temperature** -20°C~50°C
- **Lighting Model** Remote control+light control
- **Charge Time** 4-5 Hours (30% in rainy and cloudy days)
- **Working Time** 2 days(Rainy and cloudy days)



Model	Solar Panel	Watts	Lumen	Lithium Battery	Beam angle	Dimension
OS-18-001SL	6V / 15W	50W	1200lm	3.2/12Ah	120°	L467xW160xH73mm
	6V / 20W	100W	1800lm	3.2/18Ah	120°	L528xW180xH83mm
	6V / 25W	150W	2400lm	3.2/24Ah	120°	L600xW200xH83mm



- **Material** Aluminium+PC Lens
- **Color rendering index** Ra≥80
- **Ingress Protection** IP66
- **Operating temperature** -20°C~50°C
- **Lighting Model** Remote control, light control with battery capacity indicator
- **Charge Time** 4-5 Hours (30% in rainy and cloudy days)
- **Working Time** 2 days(Rainy and cloudy days)



Model	Solar Panel	Watts	Lumen	Lithium Battery	Beam angle	Dimension
OS-18-002FL	6V/8W	50W	1200LM	3.2/6Ah	120°	L200xW140xH30mm
	6V/15W	100W	1800LM	3.2/12Ah	120°	L 280xW196xH30mm
	6V/20W	200W	3200LM	3.2/15Ah	120°	L350xW250xH35mm
	6V/30W	300W	4000LM	3.2/25Ah	120°	L 380xW280xH35mm